
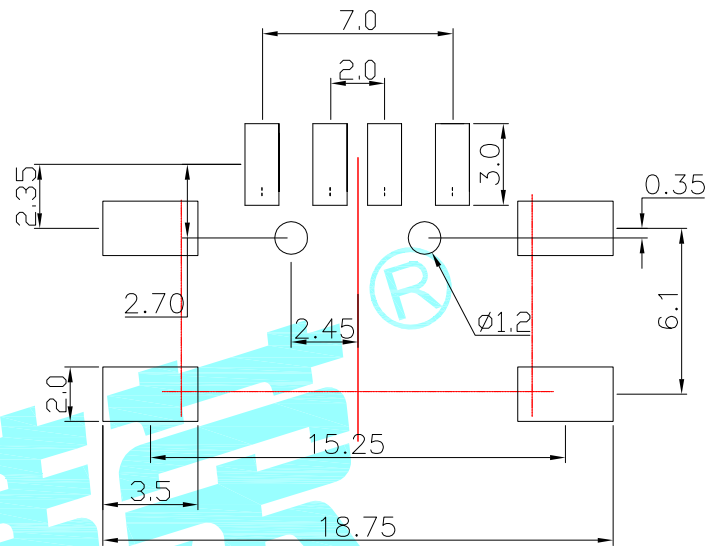
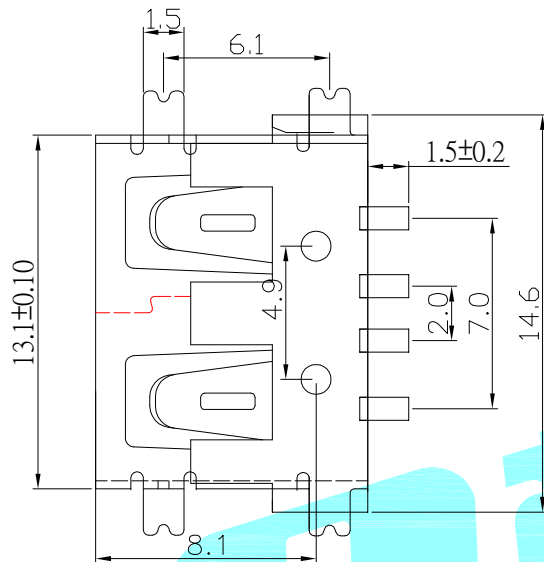


ROHS

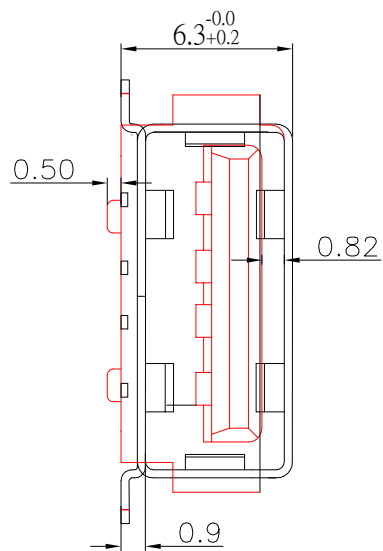

规格说明: Specifications:

电气特性:Electrical:

1. 额定电流: Current Rating

1.5A/contact terminal

2. 额定电压: Voltage Rating

物理性能: Mechanical:



1. 插拔力: Cnnector Mate and Unmate Force

Mate force:3.57kgf(MAX)

Unmate force:1.02kgf(MIN)


2.端子保持力: Terminal Retention

1.0kgf(MIN)

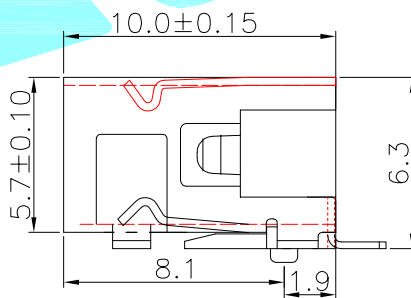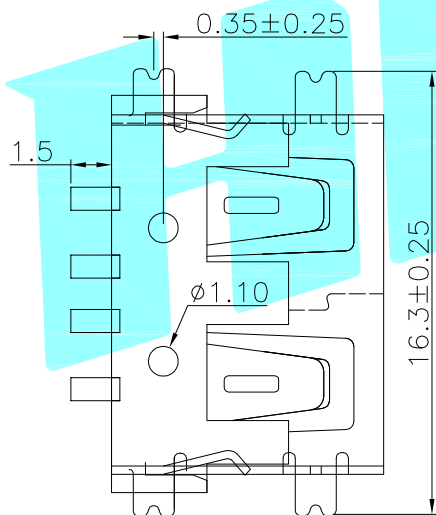

PART NO	外壳
U-A-24SS-W-2	铁壳
U-A-24SS-W-2T	铜壳

③	Base	—	1	NYLON	White/Black
②	Terminal	—	4	Phosphor Bronze	Ag Plated
①	Housing	—	1	SPCC/Phosphor Bronze	Ni Plated
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING

APPROVALS			DATE	 ELECTRONICS CO.,LTD		
DRAWN	JIANKUN.LU	2018.08.01				
CHECKED				TITLE:	USB CONNECTOR	
APPROVALS				PART NO.		
TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
	10~30	±0.25				
	5~10	±0.20				
	~ 5	±0.15				
			±2°	DRAWING NO.	_____	SHEET 1 OF

							CHECKED				TITLE:	USB CONNECTOR	
							APPROVALS				PART NO.		
	A		NEW				TOLERANCES ARE	30~以上	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ: 
						10~30		±0.25					
						5~10		±0.20					
						~ 5		±0.15					
ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.				±2'	DRAWING NO.		SHEET 1 OF